
# Professional Solutions With Reliable Quality Tools

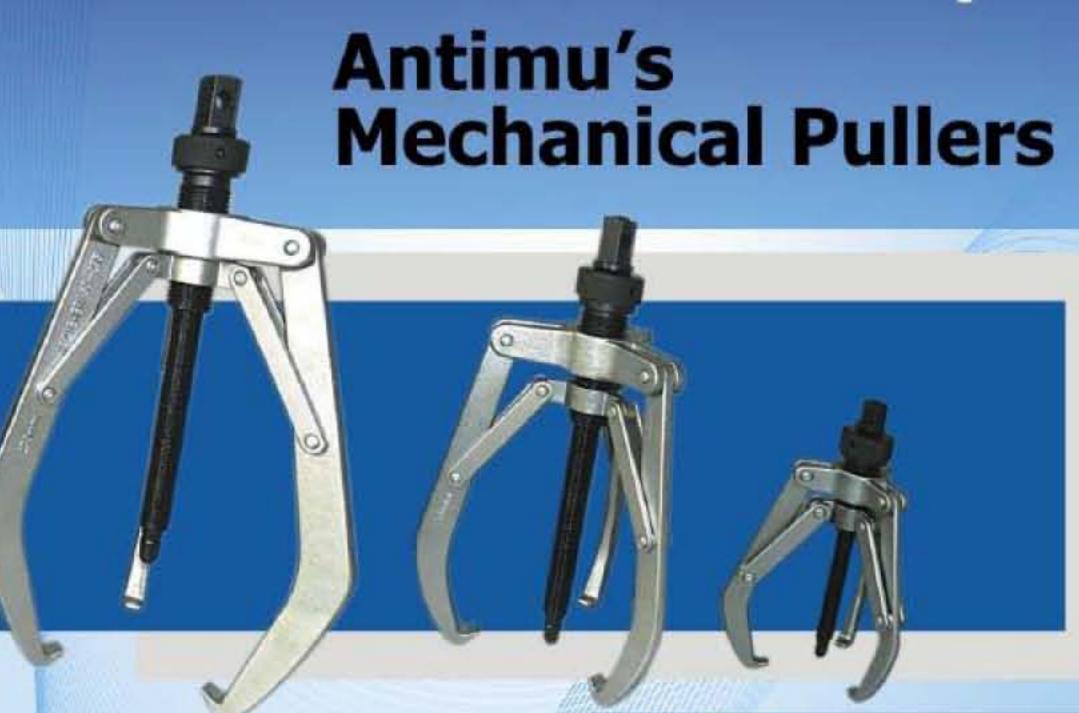

### Features:

- Unique "Synchronised-Acting" jaws system for one man efficient working
- Roll threaded shaft reduces efforts even on application of high torque.
- Heat treated and Anodized Jaws for max. safety and durability
- Anodized three jaw cross head for rust prevention.
- Self-locking jaws eliminate the puller jaw slipping off under loading and/or parts dismounted after.
- Pullers with 3 Jaws for added strength.

| Technical Spec | ifications |        |        |      |      |
|----------------|------------|--------|--------|------|------|
| Model Number   | Tons       | Reach  | Spread | N.W. | G.W. |
| PK-130         | 5          | 120 mm | 130 mm | 1.95 | 2.15 |
| PK-230         | 8          | 200 mm | 230 mm | 4.7  | 5.26 |
| PK-295         | 10         | 290 mm | 295 mm | 5.95 | 6.75 |

## 2 Jaws Internal / External Pullers



| Model Number | Tons | Reach  | O/S Pulling | I/S Pulling | N.W.   | G.W.   |
|--------------|------|--------|-------------|-------------|--------|--------|
| CK2-65       | 1.5  | 65 mm  | 25-65 mm    | 45-105 mm   | 0.42kg | 0.44kg |
| CK2-90       | 3    | 100 mm | 30-90 mm    | 50-130 mm   | 1kg    | 1.03kg |
| CK2-130      | 3    | 100 mm | 45-130 mm   | 50-170 mm   | 1.1kg  | 1.13kg |
| CK2-160      | 4    | 145 mm | 45-160 mm   | 60-230 mm   | 2.88kg | 2.98kg |
| CK2-210      | 4    | 145 mm | 45-210 mm   | 60-280 mm   | 3.12kg | 3.22kg |
| CK2-270      | 5    | 190 mm | 65-270 mm   | 90-330 mm   | 7.73kg | 7,88kg |
| CK2-340      | 5    | 190 mm | 65-340 mm   | 90-395 mm   | 8.38kg | 8.53kg |

#### Features:

- These pullers are very convenient for light jobs.
- The puller design allows the arms to be used for both external and internal extractions.
- Forged high quality steel components make the pullers very dependable



### PRANAM Engineering

45, Kirtidham Complex, Nr.Dinesh Hall, Income Tax, Ahmedabad –380009 Telefax: 079-26586570

E-mail: info@pranamengineering.com